

# TSxx715A0000G



TS xx 71 x A xxxx G			
02 2 CONTACTS	Color	0000: "@" Logo	RoHS
03 3 CONTACTS	0 Black (RAL9005)	000A: "ANYTEK" Mark	Pb<40,000ppm
...	2 Red (RAL3001/D)	009: "ANYTEK" Mark	
24 24 CONTACTS	3 Orange(RAL2011/P)	Any special item by customer request.	
	4 Yellow(RAL1018/A)	please contact sales department.	
	5 Green(RAL6018/T)		
	6 Blue (RAL5015/A)		
	8 Grey(RAL7035/D)		





Pitch	3.50 mm
Poles	2 P a 24 P
Rated	300V 8A
Wire	



Borna hembra acodada paso 5.00 mm

## Electrical

Safety category:	cULus
Voltage rating:	300V
Current rating:	8 A
Wire range:	1.5 mm <sup>2</sup>
Solid wire(AWG):	16 - 28
Stranded wire(AWG):	16 - 28
Torque:	1.7
Screw:	M2
Wire strip length:	6 a 7 mm
Withstanding Voltage:	2.5 KV
Safety Approval:	
Operating temperature:	-40°C to +115°C
Soldering temperature:	

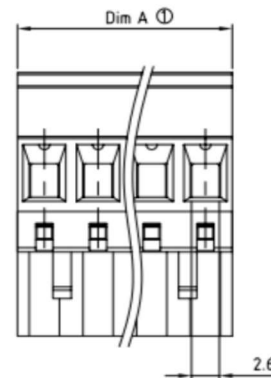

N = Number of poles  
 Dim A=Nx5.0  
 Dim B=(N-1)x5.0

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.25	±0.25
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

SERIE TS